



ALASKA RAILROAD

PROJECT FACTS

March 26
2015

Port MacKenzie Rail Extension

Project Scope

The Matanuska-Susitna Borough (MSB) and the Alaska Railroad Corporation (ARRC) jointly propose construction and operation of a new rail line to connect the Borough's Port MacKenzie to ARRC's rail system. The port lies about 30 miles southwest of Wasilla and about 5 miles due north of Anchorage, across Cook Inlet. The selected route involves 32 miles of new rail line extending from Port MacKenzie to the Alaska Railroad's main line just south of Houston.

Port MacKenzie has a deep draft dock (60 feet at low tide) that requires no dredging and can serve the world's largest ships (Panamax and Cape Class vessels). The port's 8,940 upland acres and 1,300 tide-land acres provide ample room to accommodate bulk resource storage, transport and processing facilities, as well as rail and terminal facilities for efficient train loading and unloading.

The project includes an Environmental Impact Statement (EIS) as required by the National

Environmental Policy Act (NEPA). The EIS and associated studies identified and analyzed feasible alignment alternatives, completed preliminary engineering design on alternatives, estimated construction costs, and determined the project's economic, financial and engineering feasibility.

When complete, the new rail line would operate as part of the Alaska Railroad system.

Project Benefits

- With the longest rail car loop in Alaska, the extension offers highly-efficient offloading of bulk resources from train to ship.
- For Interior shippers, the new rail link shortens the distance to tidewater.
- Increased rail freight activity, and development stimulated by the rail link, would benefit railbelt communities through increased employment, contributions to the state and community tax base, and overall economic health.



Segment 3 grade work north of W. Susitna Parkway mid-summer 2013.

PROJECT FACTS



ALASKA
RAILROAD

- With ample room for staging and assembling, Port MacKenzie is an ideal site for large construction projects, such as oilfield modules or pipeline assembly.

Project Status & Timeline

- In June 2007, MSB and ARRC signed a Memorandum of Agreement to pursue environmental work, engineering and alternative analysis in support of the Surface Transportation Board (STB)-led environmental document for a Port MacKenzie rail line extension.
- Following an extensive environmental review process, the STB issued a record of decision in 2011 recommending the Mac East Variant (Mac Central) and Houston South route.
- 2011-2013: Construction bids awarded to Bristol Construction (Segments 1 and 4), Quality Asphalt Paving (Segment 3), and Granite Construction (Segment 6).
- June 4, 2013: Ground-breaking ceremony.
- 2014: Segments 1, 3 & 6 substantially complete.
- Late 2017: Anticipated completion.

Project Participants

- **Matanuska-Susitna Borough (MSB)** - The local government that owns Port MacKenzie land and facility. The MSB is the project's *Sponsor*, and has acquired \$184 million in state legislative appropriations, to date. The MSB co-manages the project and is responsible for public and government relations, and land use planning for the project.
- **Alaska Railroad Corporation (ARRC)** - A self-sustaining corporation owned by State of Alaska, ARRC is the project's *Applicant*, responsible for rail-related technical expertise, and for support of the EIS effort. ARRC co-manages the project.



Building a Segment 1 winter trail culvert crossing fall 2013.

- **Surface Transportation Board (STB)** - STB is the lead federal agency on the project with the authority to approve construction of new rail lines (including extensions) in the United States. Because the project requires federal approval, an environmental document was prepared to meet NEPA requirements. The STB, through its Section of Environmental Analysis (SEA) was responsible for preparing the EIS.

Cost and Funding

- The total project budget is \$303.5 million.
- From 2008 to present, \$184 million has been funded via state grants.
- An additional \$119.5 million in funding is needed to complete design and construction of the project.

For More Information

Mat-Su Borough:

- Public Affairs Director Patty Sullivan at 907.745.9577

Alaska Railroad:

- Corporate Communications Officer
Stephenie Wheeler at 907.265.2671

www.portmacrail.com


- Joint MSB-ARRC web site established in 2007 to facilitate the public process prior to STB application submittal. The web site continues to incorporate project status updates and visual information.



Seeding new embankment along Segment 6 in July 2013.




Project Milepost and Segment Summary

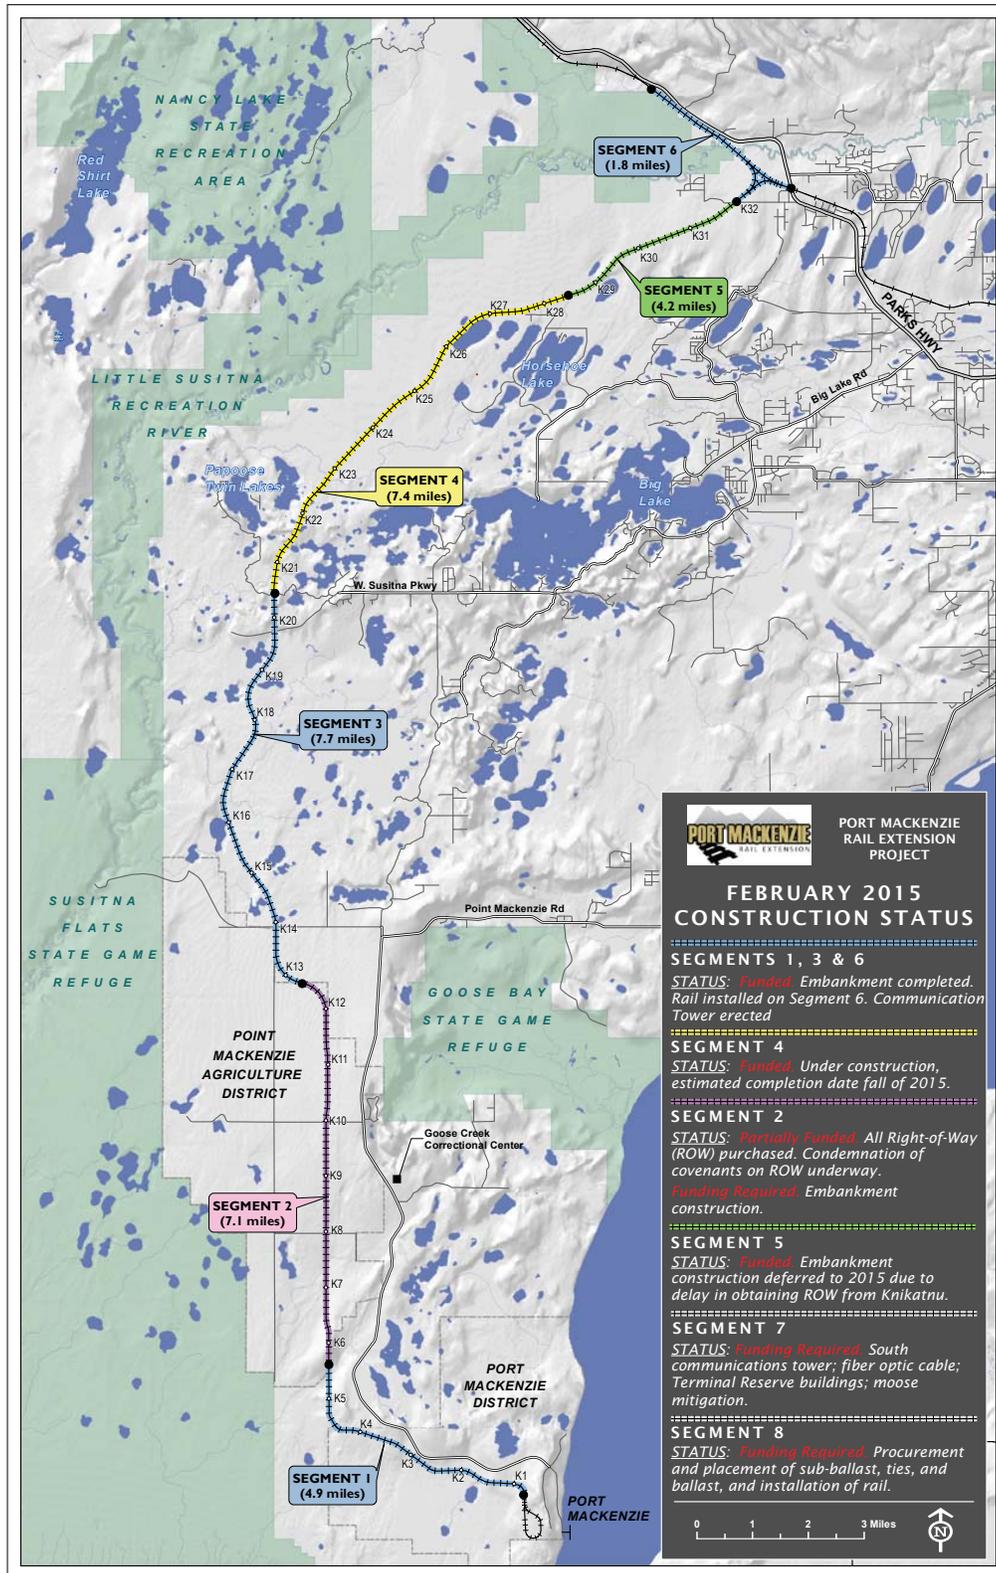





Segment One

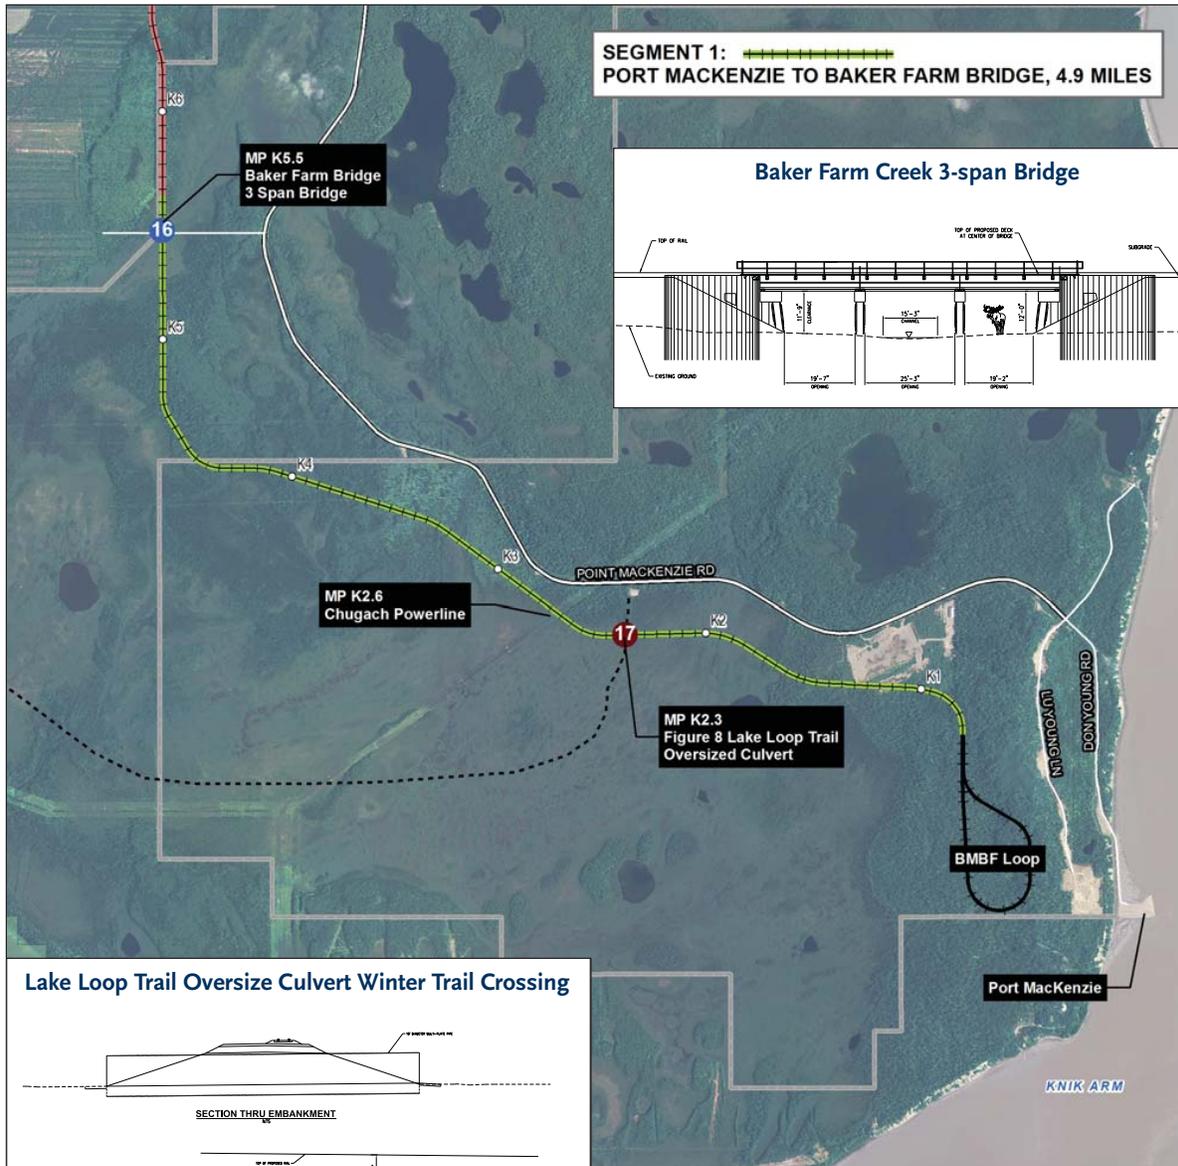

SEGMENT 1: PORT MACKENZIE TO BAKER FARM BRIDGE, 4.9 MILES

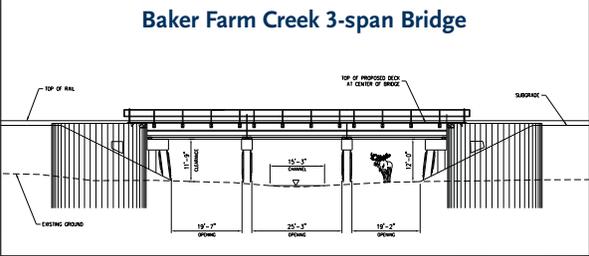

Lake Loop Trail Oversize Culvert Winter Trail Crossing

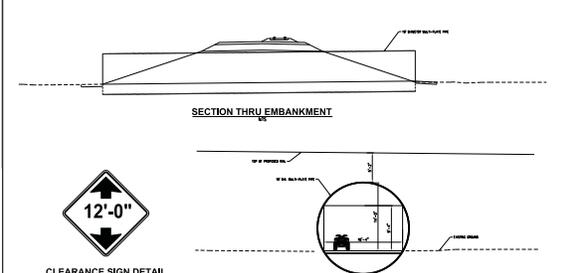

Scope

- Length: 4.9 miles
- ~ 4 million cubic yards (CY) of earth to be moved; 2.1 million CY moved to date.
- Construct 3-span, 84-foot long bridge crossing over an unnamed stream at Baker Farm.
- Install 19-foot diameter 146-foot long steel multi-plate pipe to create winter crossing at Lake Loop Trail.

Logistics


- Contractor: Bristol Construction Services
- Begin: Construction began in spring 2012
- Substantially completed in fall 2014.

Status

- Construction accomplished in 2012 included clearing and earthwork.
- Earthwork continued through 2014.
- Segment work was substantially complete by fall 2014.



Segment Three

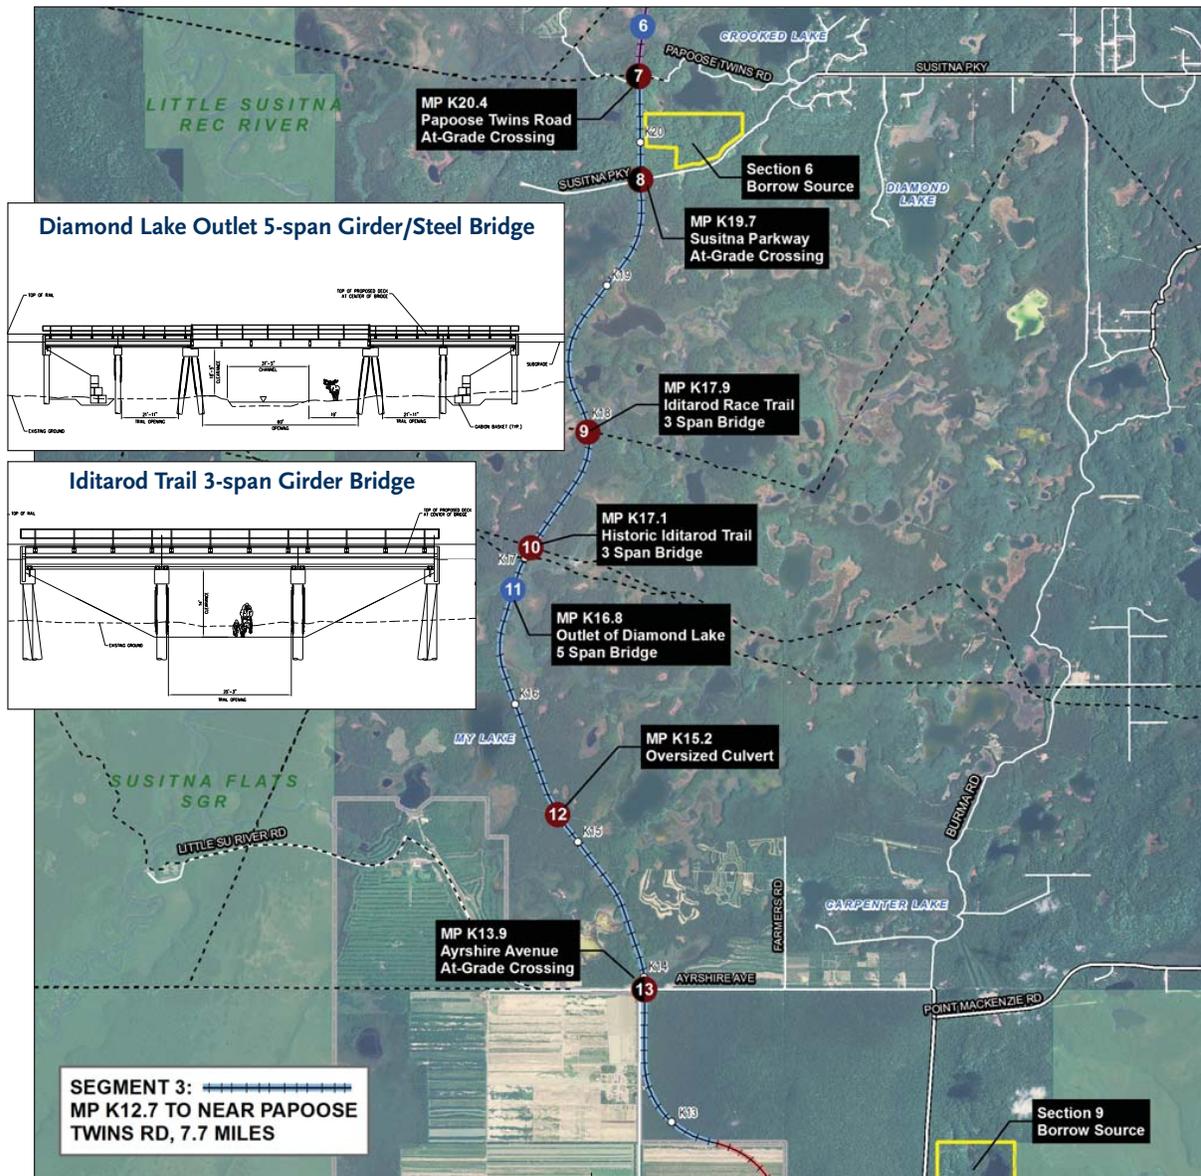

Scope

- Length: 7.7 miles
- ~ 1.1 million CY of earth to be moved
- Construct three bridges:
 - 5-span, pre-cast girder and steel beam bridge over Diamond Lake Outlet/Outfall.
 - 3-span, pre-cast girder bridge over Historic Iditarod Trail.
 - 3-span, pre-cast girder bridge over Iditarod Race Trail.
- Install 18-foot diameter 128-foot long steel multi-plate pipe to cross unnamed trail.

Logistics


- Contractor: Quality Asphalt Paving (QAP)
- Begin: construction begins spring 2013.
- Completion: substantially completed summer 2014.

Status

- Most grade construction completed in 2013.
- Segment work was substantially complete by summer 2014.



Segment Four

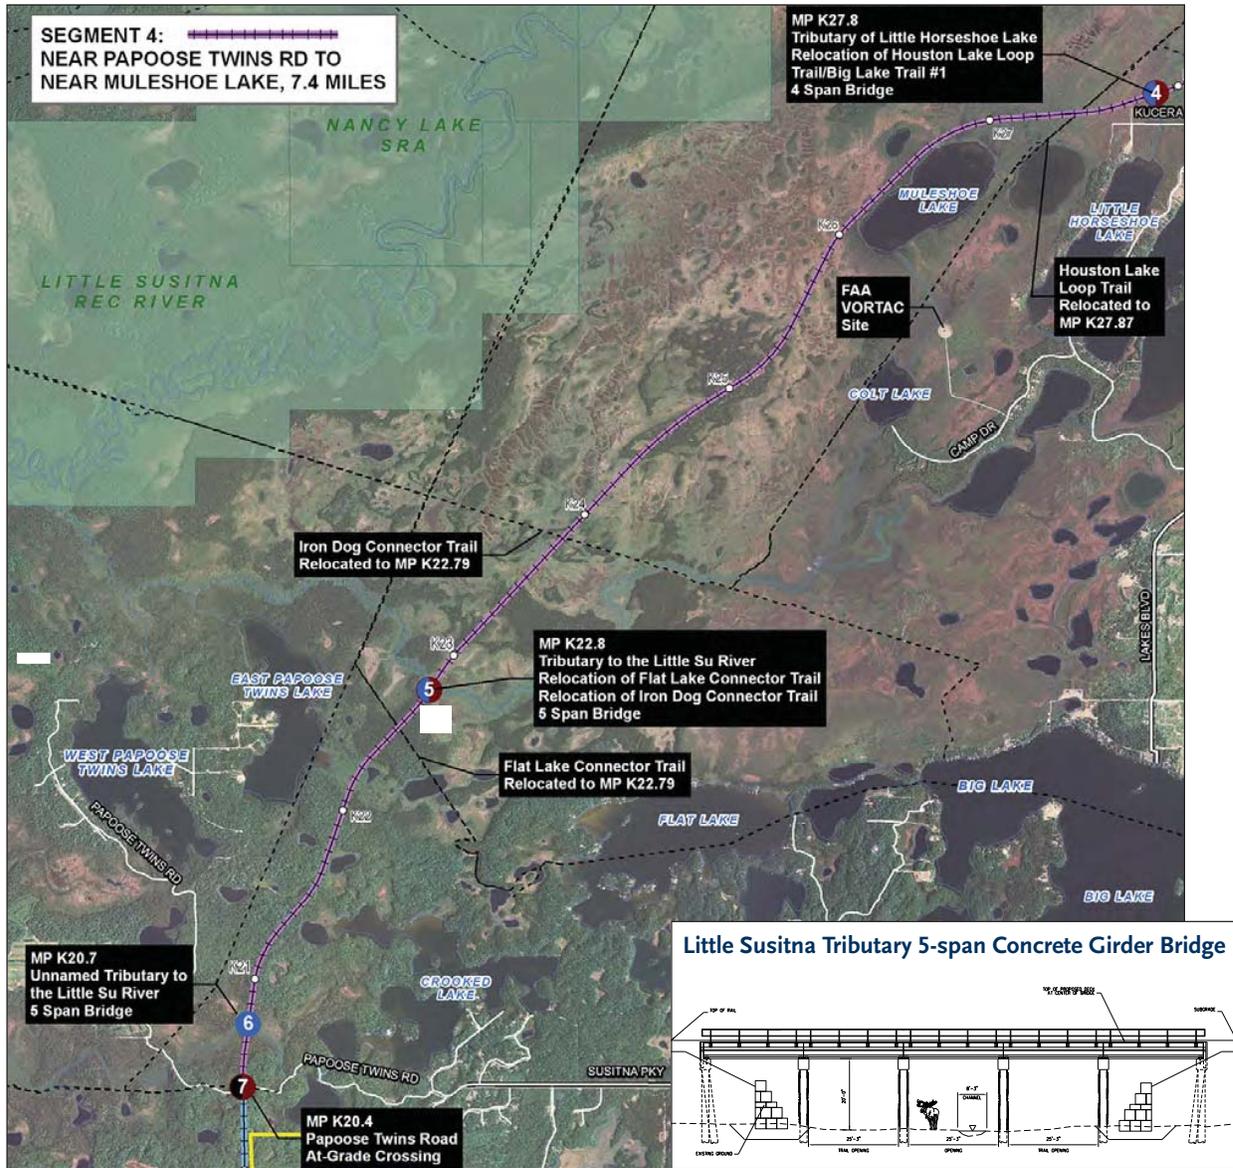

Scope

- Length: 7.4 miles
- ~ 1.0 million CY of earth to be moved
- Construct three bridges:
 - 5-span, concrete girder 140-foot bridge over Tributary to Little Susitna River.
 - 5-span, concrete girder 140-foot bridge over Iron Dog Trail.
 - 4-span, concrete girder 112-foot bridge over Houston Loop Trail.
- Closest residence is 970 feet.

Logistics


- Contractor: Bristol Construction Services
- Begin: construction begins winter 2013.
- Completion: scheduled for fall 2015.

Status

- Clearing and grubbing is completed.
- Earthwork is underway and will be completed by fall 2015
- Bridge work is underway and will be completed by early summer 2015.
- Segment work to be substantially complete by end of 2015.



Segment Six

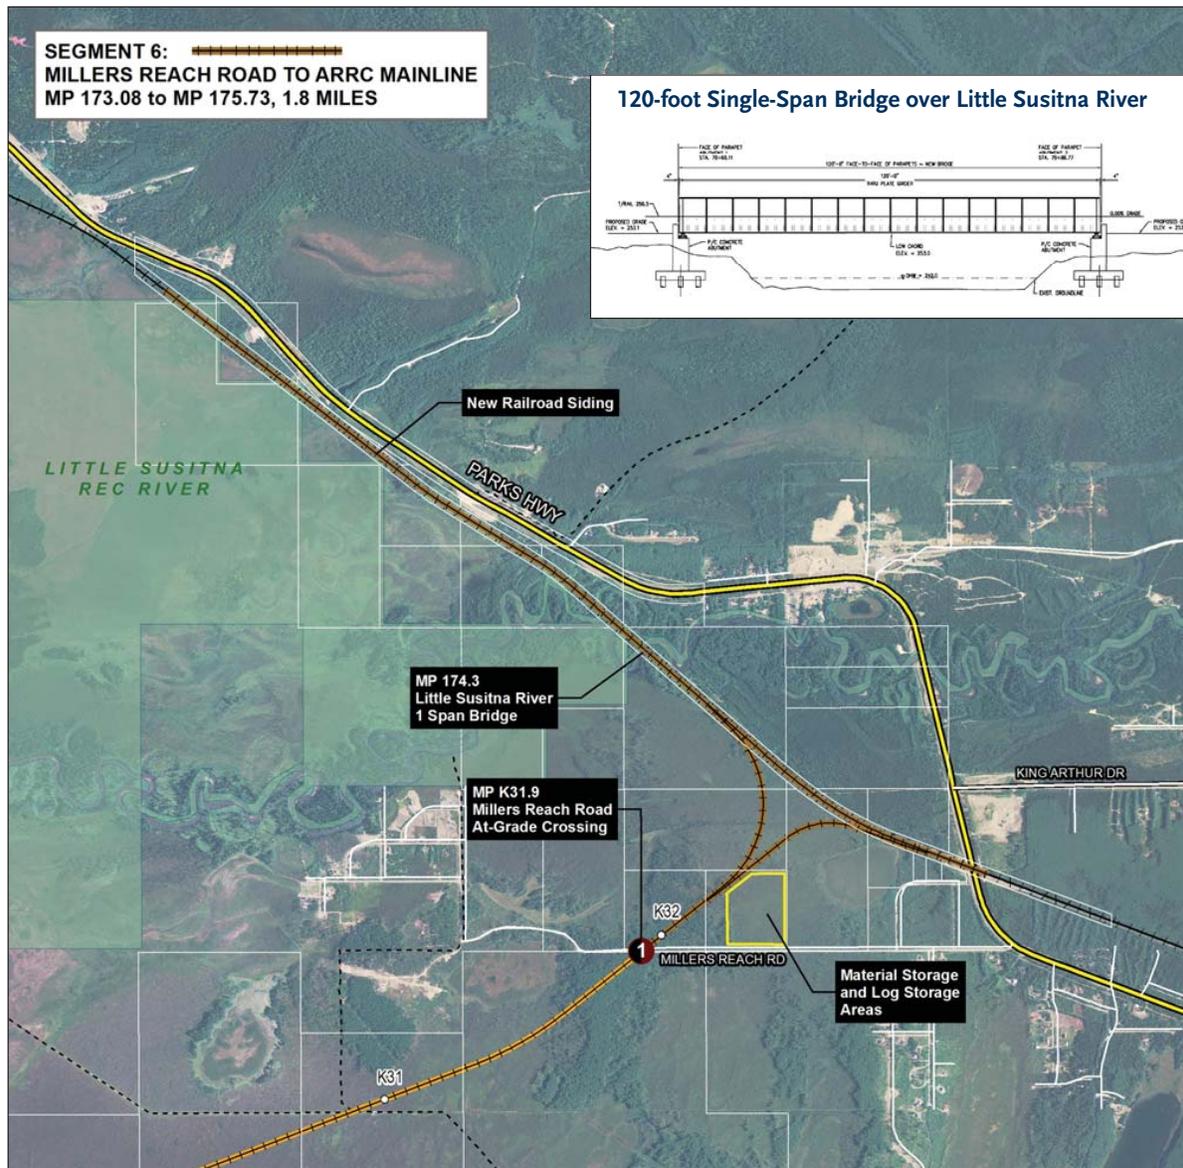

Scope

- Length: 1.8 miles new embankment and widen 2.9 miles of existing mainline embankment
- ~ 630,000 CY of earth to be moved
- Construct single-span 118-foot long steel girder bridge over the Little Susitna River.
- Construct a “Y” rail connection and a new siding adjacent to the Alaska Railroad main line.

Logistics

- Contractor: Granite Construction
- Begin: construction begins spring 2013.
- Completion: substantially completed by summer 2014.

Status

- Grade work completed in 2013.
- Segment work was substantially complete by summer 2014.